

直驱伺服转台 DDR

扭矩

●峰值: 4.5N.m ●额定: 1.5 N.m

最高转速

● 300RPM

反馈

- ●可外置光栅尺表贴做角位移反馈
- ●可内置圆光栅栅角位移传感器





电气参数:

符号	单位	ICR-O-01
Тр	Nm	4.5
lp	Arms	4.5
Тс	Nm	1.5
lc	Arms	1.5
Kt	Nm/Arms	1
R	Ohm	8.3
L	mH	6
Vmax	V d.c.	350
外贴光栅尺	Count	5036000
Т	$^{\circ}\mathbb{C}$	120
M	Kg	3.8
Р		8
Н	mm	45.7
	Tp Ip Tc Ic Kt R L Vmax 外贴光栅尺 T M P	Tp Nm Ip Arms Tc Nm Ic Arms Kt Nm/Arms R Ohm L mH Vmax V d.c. 外贴光栅尺 Count T ℃ M Kg P



Outline Dimension (Unit: mm)

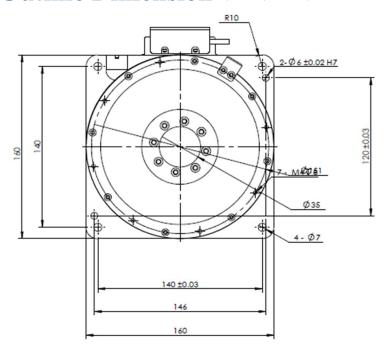



Tel: +86 755 2903 0603

