

圆磁栅（敞开式）

- 超强的抗污能力
- 读数头重量轻 (<10g)
- 单周期分辨率最高可达20位
- 集成 Set-up LED
- 特种规格磁环可按照客户要求定制



磁环:

磁环型号	读取方向	内径	外径	高度	极数	工作温度	配合读头
AMR122B118R192	径向	118mm	122mm	4mm	192	-40℃-80℃	Mag2,/Mag2s
AMR81.5B77.5R128	径向	77.5mm	81.5mm	4mm	128	-40℃-80℃	Mag2,/Mag2s
AMR126.7B122R200	径向	122mm	126.7mm	4mm	200	-40℃-80℃	Mag2,/Mag2s
AMR70C50A100	轴向	50mm	70mm	1mm	100	-40℃-80℃	Mag2,/Mag2s
AMR32C24A44	轴向	24mm	32mm	1mm	44	-40℃-120℃	Mag3

Power supply: 5V $\pm$ 5%


Power consumption: <30mA (without any load)

Temperature: -10-80度

Environmental sealing: IP67


Vibrations: 20G (55 Hz to 2000 Hz)

径向磁环（读圆周）:AMR122B118R192; AMR81.5B77.5R128; AMR126.7B122R200

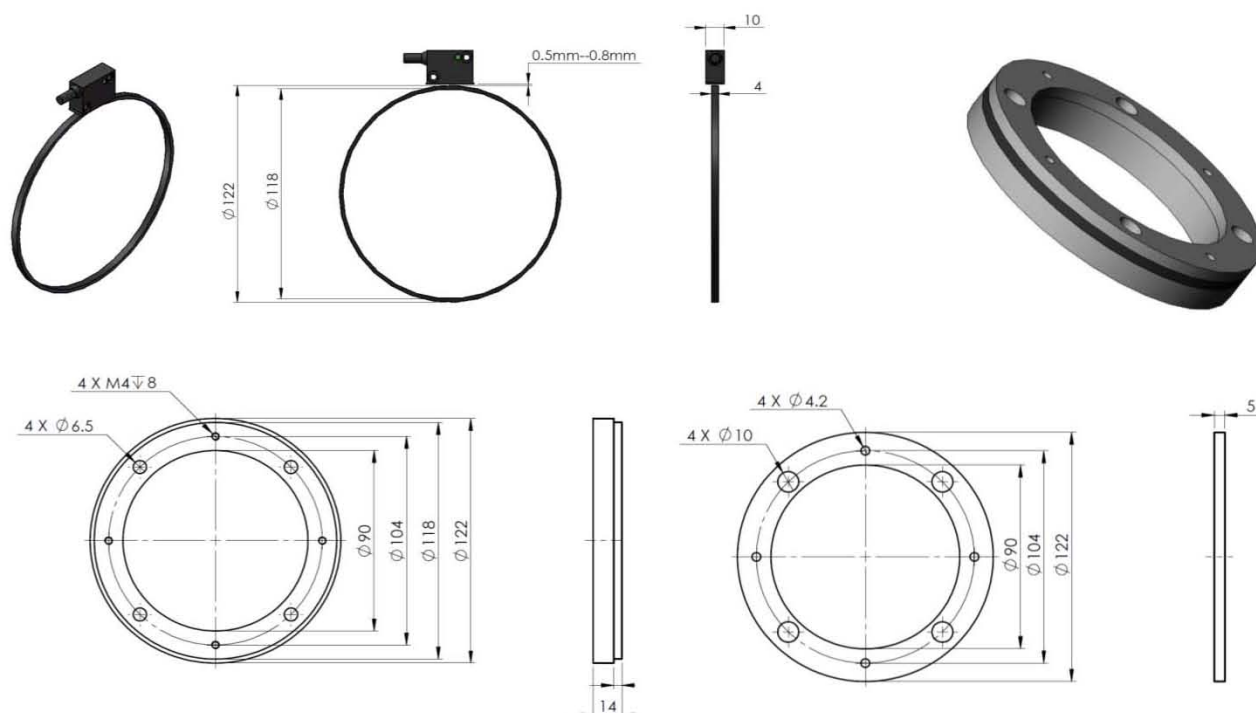


圆磁栅（敞开式）

轴向磁环：（安装方式一）AMR70C50A100

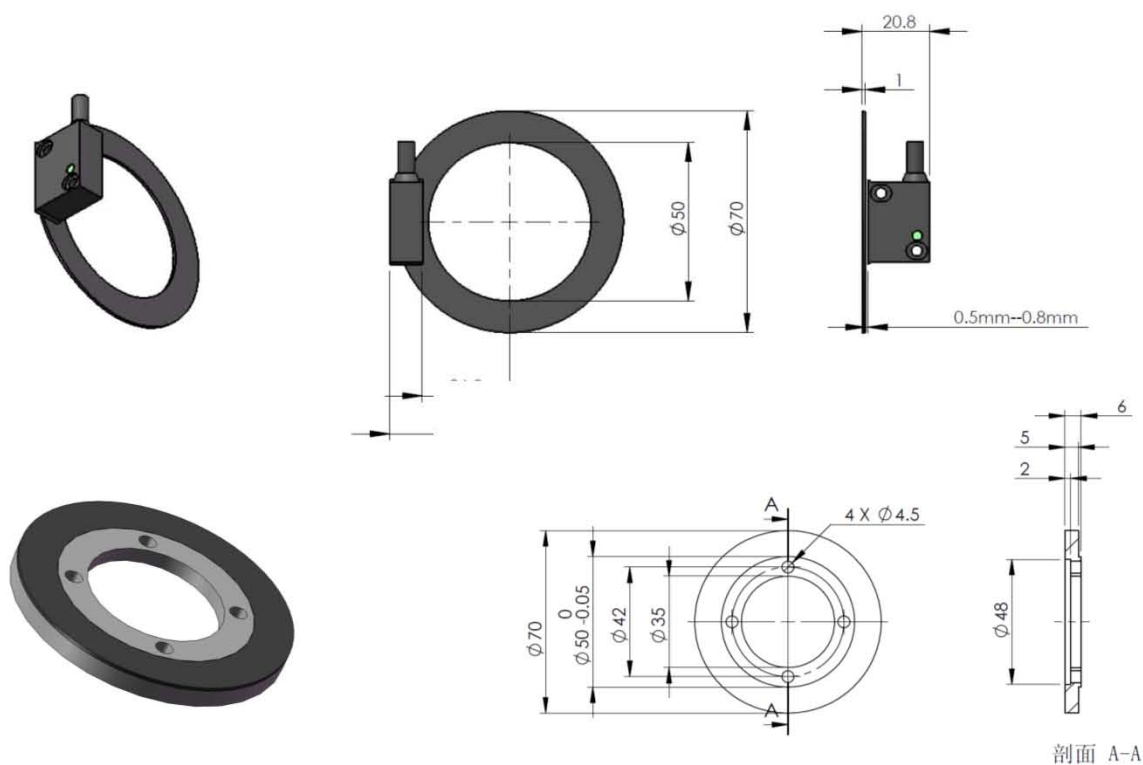


轴向磁环：（安装方式二）AMR70C50A100

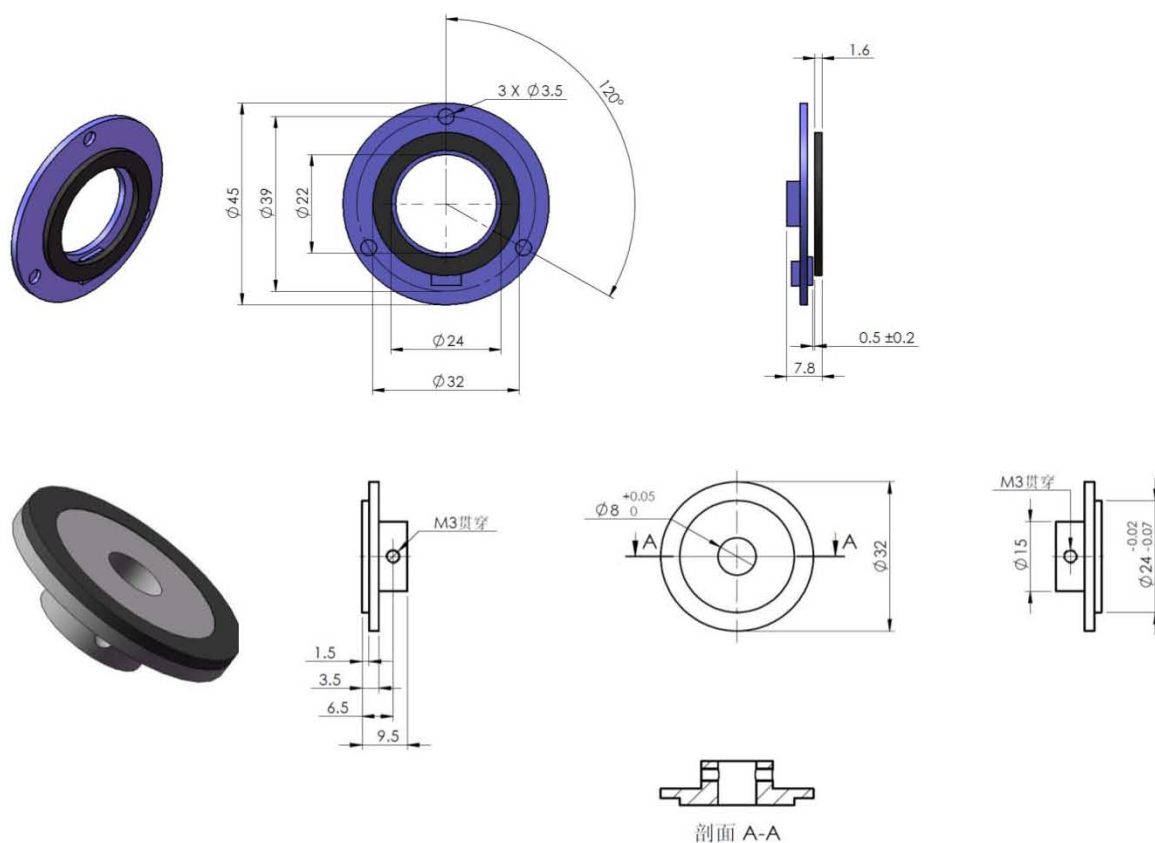


圆磁栅（敞开式）

Reader : Mag2

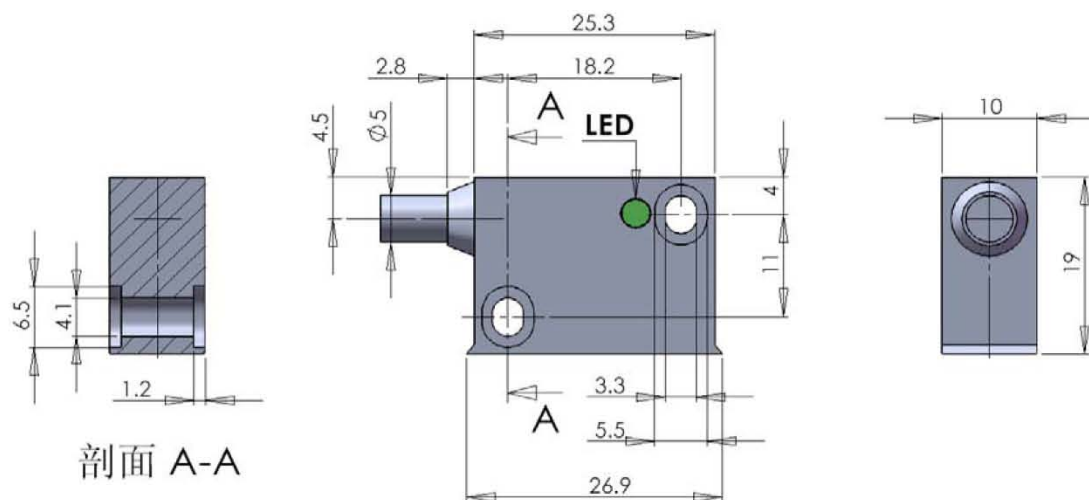

Reader : Mag2S

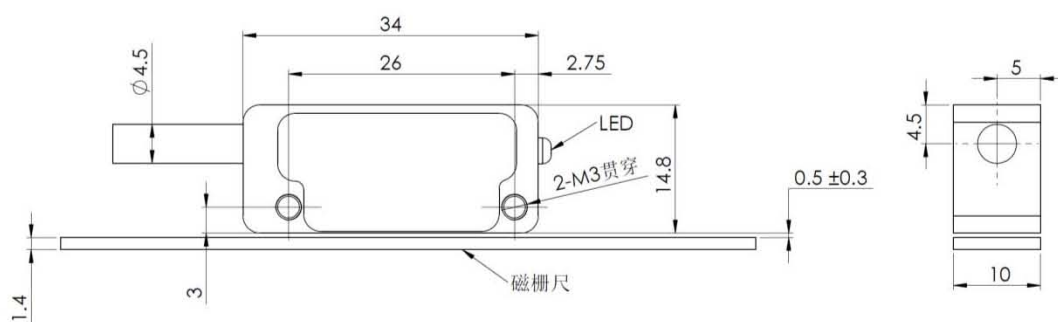

Reader : Mag 3

